

# H&S

## LW1100 LINEWRAP™ BALE WRAPPER



## Maximize Yield and Reduce Cost

Maximize baleage yield with less effort and time than conventional wrapping methods. Reduce wrap costs by wrapping only the diameter of the bale. The H&S LW1100 Linewrap efficiently wraps round bales from 4'-6' diameter, and large square bales up to 6'6" lengthwise or 5' long crosswise on riser.

Bale Trip Switch Arm



- The open design of the 7' bale platform allows debris to fall through. The length of travel of the push bar is controlled with adjustable limit switches to reduce cycle time.

- The Linewrap's two 30" pretensioners have a 65% stretch that allows for a tightly wrapped bale.



Hoop Start/Stop Switches



- The self contained hydraulic system utilizes a large capacity oil reservoir for cooler operation.

- Emergency Stop Cable



- The Linewrap's independent power source is a Honda iGX390 gas engine with electric start. An 18 amp alternator powers the hydraulic system which controls all machine functions.

# UTILITY FOR ROUND OR SQUARE BALES


## AUTOMATIC OPERATING MODE

ALLOWS FOR ONE OPERATOR TO LOAD WHILE THE MACHINE WRAPS. AN OPTIONAL REMOTE CONTROL IS AVAILABLE FOR SIDE LOADING.



- The telescoping transport pole is pinned to the steering assembly when wrapping to keep the Linewrap in a straight line or to steer around obstacles.

- Bale guides center the bales for wrapping and are easily adjusted.

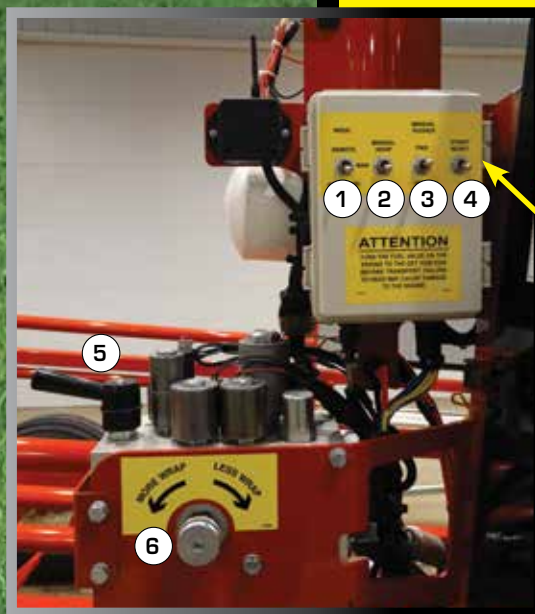


- When wrapping is finished, the bale-push is extended out manually to push the bales further down the bale ramp and complete the process.

The Linewrap controls are conveniently located.

1. Automatic/manual operation
2. Manual hoop revolution
3. Bale pusher movement
4. Start/reset switch
5. Tailgate/brake lock
6. Hoop speed control for wrap

- A shutoff valve locks the brakes hydraulically against the tires. This prevents the wrapper from rolling ahead too easily when wrapping so proper pressure is kept between bales.

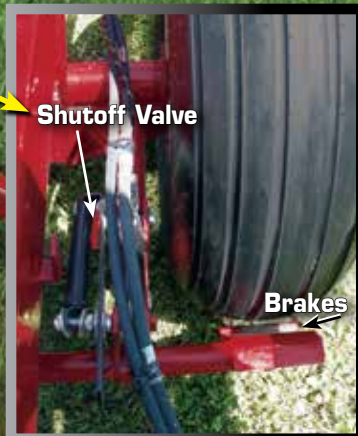

Shutoff Valve

Brakes



- The tailgate has a transport bar to lock the tailgate and a hydraulic shutoff valve that must be closed for transport.



- The riser kit that allows square bales to be wrapped crosswise is standard equipment.

# SPECIFICATIONS


POWER	HONDA iGX390 w/ELECTRIC START
HYDRAULICS	9½ GAL. SELF-CONTAINED RESERVOIR
CONTROLS	AUTOMATIC OR MANUAL
SHIPPING LENGTH	16' 10"
WIDTH	8' 10"
HEIGHT	9' 4"

WEIGHT	4,300 LBS.						
LENGTH W/TAILGATE DOWN	22' 9"						
TIRES	[4] 11L - 15						
FILM TENSIONER	[2] 30" X 65%						
BALE CAPACITY:	<table border="0"> <tr> <td>ROUND</td> <td>UP TO 6'</td> </tr> <tr> <td>SQUARE</td> <td>6' 6" LENGTHWISE</td> </tr> <tr> <td>SQUARE</td> <td>5' CROSSWISE</td> </tr> </table>	ROUND	UP TO 6'	SQUARE	6' 6" LENGTHWISE	SQUARE	5' CROSSWISE
ROUND	UP TO 6'						
SQUARE	6' 6" LENGTHWISE						
SQUARE	5' CROSSWISE						

# OPTIONS



An optional electric over hydraulic steering assembly is controlled by the loading operator with a remote control (B).

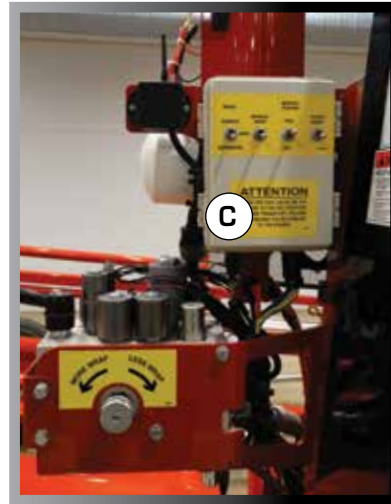

The control box (C) and remote control (B) can be ordered with your choice of either of the following options:

- Bale wrapping start and stop or
- Bale wrapping start/stop and steering of the Linewrap



## Optional Light Kit

The optional LED light kit is a nice feature for evening and night wrapping in cooler conditions.



The optional Riser Shelf & 3rd Spear is needed to wrap up to 6½' long square bales lengthwise.

Warranty: See operators manual for warranty details and limitations. H&S reserves the right to change its products or the description at any time without notice or obligation.



Models and specifications are subject to change without prior notice. 2/18 2.5M

# H & S MANUFACTURING CO. INC.

2608 S. Hume Avenue  
 Telephone (715) 387-3414  
 FAX (715) 384-5463 • Website www.hsmfgco.com  
**MARSHFIELD, WI 54449**



H&S WAREHOUSE 10145 Lakeshore Road  
 P.O. Box 1260 • Telephone (716) 736-7595  
 FAX (716) 736-7596 • Website www.hsmfgco.com  
**RIPLEY, NY 14775**