

# H&S

# TOP SHOT

## SIDE DISCHARGE MANURE SPREADERS






Shown with optional rear splash guard and side rails



The **5115** features a 3 Section - 30" Expeller with a quick release poly-lined fine spread pan.

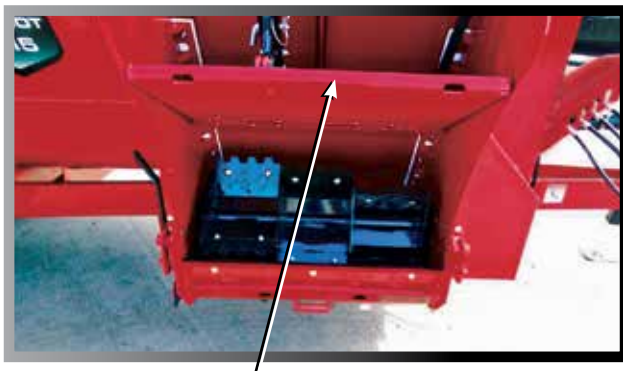

A manual adjust top shield allows you to set the distance of material being discharged.

Model	5115
CUBIC FT. STRUCK LEVEL	172
GALLON CAPACITY	1286
TANK LENGTH	14'
OVERALL LENGTH	20' 10"
TANK WIDTH - TOP	70"
AUGER DIAMETER	24"
POLY LINED TANK	Left Side
OVERRUNNING CLUTCH	Yes
SHEAR BOLT PROTECTION	Yes
PTO	540 RPM Std. 1000 RPM Opt.
EXPELLER WIDTH	30"
FRONT SPLASHGUARDS	Standard
REAR SPLASHGUARDS	Optional
AUTOMATIC OILER	Optional
HIGHWAY LIGHTING	Optional
WEIGHT	5,740#

5115 Tire Specifications	
TIRES	w/19L x 16.1
SIDE LOADING HEIGHT	65.75"
HEIGHT @ REAR CYLINDER BRACKET	66.75"
HEIGHT @ FRONT SPLASH	79"
OVERALL WIDTH	88.5"

**An optional tandem axle is available with your choice of 295R x 225 recap tires or 16.5 x 16.1 floatation tires.**



# ALL MODELS EXCEPT THE 5115

are available with the optional Digi-Star GT400,  
or Nutrient Tracker Scale System with GPS



The **5120** and **5126** manure spreaders have a flip-over adjustable hitch for proper height adjustment.



The **5115**, **5120** and **5126** drive system features a sprocket reduction system with heavy-duty chain, and an overrunning clutch with shear bolt protection for smooth power transfer.



A master/slave cylinder system raises and lowers the main auger evenly to keep material moving to the expeller.

The highway lighting system connects to the 7-pin tractor plug for added safety. Optional on the **5115**.



Model	5120
CUBIC FT. STRUCK LEVEL	268.6
GALLON CAPACITY	2009
TANK LENGTH	16'
OVERALL LENGTH	22' 8"
TANK WIDTH - TOP	76"
AUGER DIAMETER	24"
POLY LINED TANK	Left Side
OVERRUNNING CLUTCH	Yes
SHEAR BOLT PROTECTION	Yes
PTO	540 RPM Std. 1000 RPM Opt.
EXPELLER WIDTH	40"
FRONT AND REAR SPLASHGUARDS	Yes
WEIGHT	6,860#

## 5120 Tire Specifications

TIRES	SIDE LOADING HEIGHT	HEIGHT @ REAR SPLASH	HEIGHT @ FRONT SPLASH	OVERALL WIDTH
Drop Axle w/295 x 22.5	69"	70"	76"	85"
Drop Axle w/16.1 x 16.5	68.5"	69.5"	75.5"	91"
Std Axle w/295 x 22.5	72.5"	73.5"	79.5"	85"
Std Axle w/16.1 x 16.5 Tires	72"	73"	79"	91"
High Axle w/295 x 22.5	74.5"	75.5"	81.5"	85"
High Axle w/16.1 x 16.5 Tires	74"	75"	81"	91"

**TOP SHOT**  
5120, 5126, 5130  
Standard Features

- 40" Wide "Top Shot" Expeller
- Automatic Chain Oiler System
- Left Side Poly Lined Tank
- Highway Lighting System
- Remote Grease System
- Shear Bolt Protection

**5126  
2600 GALLONS**



Model	5126
CUBIC FT. STRUCK LEVEL	347
GALLON CAPACITY	2596
TANK LENGTH	16'
OVERALL LENGTH	22' 8"
TANK WIDTH - TOP	87"
AUGER DIAMETER	24"
POLY LINED TANK	Left Side
OVERRUNNING CLUTCH	Yes
SHEAR BOLT PROTECTION	Yes
PTO	540 RPM Std. 1000 RPM Opt.
EXPELLER WIDTH	40"
FRONT AND REAR SPLASHGUARDS	Yes
WEIGHT	7,880#



The left side poly liner allows material to slide to the auger.

The **5115, 5120 & 5126** feature a 24" diameter round core segmented auger.

The **5134 & 5142** have a larger 30" diameter round core segmented auger.

**All Auger Systems** hydraulically raise and lower a full 8" to break-up material that may bridge during the unloading process.

**5126 Tire Specifications**

TIRES	SIDE LOADING HEIGHT	HEIGHT @ REAR SPLASH	HEIGHT @ FRONT SPLASH	OVERALL WIDTH
w/16.1 x 16.5	81"	82"	88"	103"
w/425 x 22.5	83"	84"	90"	102"
w/19L x 16.1	84"	85"	91"	105"

**TOP SHOT**  
**5134, 5142**  
es  
ller Beater  
tem



An automatic oiler system oils the drive system chains anytime the discharge door is raised. Optional on the **5115**.

A scraper holder is standard equipment.

Jack storage is on the left side of the manure spreader.

The heavy-duty expeller system with a quick release poly-lined fine spread pan and side fins help cut the drift of material towards the tractor and spreader, and provide an excellent spread pattern.







The manual adjust top expeller shield sets the distance of the spread pattern, while the hydraulic cylinder allows adjustment for rate of application.

Reversible bolt-on square tooth paddles shred and rip material with a "Top Shot" action for an even spread pattern.

Model	5134
CUBIC FT. STRUCK LEVEL	451
GALLON CAPACITY	3377
TANK LENGTH	16'
OVERALL LENGTH	23' 7"
TANK WIDTH - TOP	97"
AUGER DIAMETER	30"
POLY LINED TANK	Left Side
OVERRUNNING CLUTCH	Yes
SHEAR BOLT PROTECTION	Yes
PTO	1-3/8" or 1-3/4" 1000 RPM
EXPELLER WIDTH	40"
FRONT AND REAR SPLASHGUARDS	Yes
WEIGHT	10,940#

### 5134 Tire Specifications

TIRES	SIDE LOADING HEIGHT	HEIGHT @ REAR SPLASH	HEIGHT @ FRONT SPLASH	OVERALL WIDTH
w/ 425 x 22.5	93"	101"	101"	112"
w/ 21L x 16.1	95"	103"	103"	114"
w/ 49 x 17 x 20	93"	101"	101"	117"
w/ 700/50 x 22.5	94"	102"	102"	126"

**5142  
4200 GALLONS**



The **5134** and **5142** drive system features a heavy duty gearbox reduction and an overrunning clutch with shear bolt protection for smooth power transfer.

## 5134 and 5142 Options

Model	5142
CUBIC FT. STRUCK LEVEL	564
GALLON CAPACITY	4200
TANK LENGTH	20'
OVERALL LENGTH	27' 7"
TANK WIDTH - TOP	97"
AUGER DIAMETER	30"
POLY LINED TANK	Left Side
OVERRUNNING CLUTCH	Yes
SHEAR BOLT PROTECTION	Yes
PTO	1000 RPM 1 3/4" Std. 1000 RPM 1 3/4" Opt.
EXPELLER WIDTH	40"
FRONT AND REAR SPLASHGUARDS	Yes
WEIGHT	16,500#



The hydraulic lid can be installed to open and latch from either side. A 3rd tractor remote is needed to operate the opening and closing of the lid. This remote is also used in conjunction with an electrical toggle switch to activate the switching of the hydraulic valve that operates the hydraulic cylinder to lock and unlock the lid.

### 5142 Tire Specifications

TIRES	28L x 26
SIDE LOADING HEIGHT	93"
HEIGHT @ REAR SPLASH	101"
HEIGHT @ FRONT SPLASH	101"
OVERALL WIDTH	12'

Warranty: See operators manual for warranty details and limitations. H&S reserves the right to change its products or the description at any time without notice or obligation.



Manufactured in U.S.A.



NEED A QR CODE READER?  
DOWNLOAD THE FREE APP  
TO YOUR SMARTPHONE!

*Buy the BEST*

BUY

**H&S**

Models and specifications are to change without prior notice.

7/16 2M

# H & S MANUFACTURING CO. INC.

2608 S. Hume Avenue  
P.O. Box 768 • Telephone (715) 387-3414  
FAX (715) 384-5463 • Website [www.hsmfgco.com](http://www.hsmfgco.com)  
**MARSHFIELD, WI 54449**



H&S WAREHOUSE 10145 Lakeshore Road  
P.O. Box 1260 • Telephone (716) 736-7595  
FAX (716) 736-7596 • Website [www.hsmfgco.com](http://www.hsmfgco.com)  
**RIPLEY, NY 14775**