



MODEL 2280



MODEL 2213

FEATURES

- Spreader box is constructed of powder coated steel. The heavy-duty steel A-frame and hitch assembly is built to withstand the stress of heavy loads and rough roads.
- The Model 2217 uses an all-welded heavy-duty A-frame hitch assembly and full length unitized main frame.
- All spreaders utilize a bonded poly floor to reduce main apron drag and power needed to move the load.


LARGE DIAMETER BEATER

The large diameter beater on Models 2213 and 2217 provides an even spread pattern.



SHIFTING ON PTO MODELS

Shifting on the PTO models is done in the H&S two-spread gearbox plus beater shut-off.

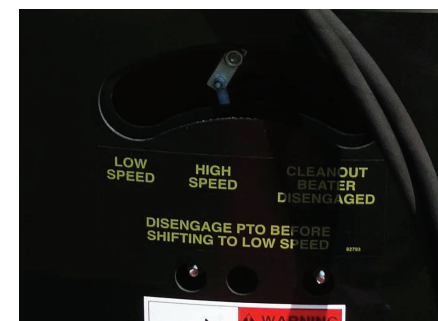

2-SPEED APRON DRIVE SYSTEM

A 2-speed apron drive system is standard equipment on all PTO models.



MAIN APRON TIGHTENER BOLTS

On all models, the main apron tightener bolts are located outside on the lower right and left corners of the main frame for adjustment.

SHOWN WITH OPTIONAL HYDRAULIC ENDGATE



MODEL 2217

OPTIONS



OPTIONAL REAR TRIP PAN

The heavy-duty beater assembly assures aggressive shredding action with wide, even spread patterns.

MODEL	2280 PTO DRIVE	2213 PTO DRIVE	2217 PTO DRIVE
CAPACITY – HEAPED (OLD RATING) BU.	80 BU.	130 BU.	175 BU.
CAPACITY – CU. FT. STRUCK LEVEL	53	72	105
TOP OF FLARE WIDTH	48" (122 CM)	63 1/2"	63 1/2" (161 CM)
INSIDE WIDTH	48" (122 CM)	54"	54" (137 CM)
INSIDE LENGTH	7' 4" (223 CM)	7' 4"	11' 1" (338 CM)
INSIDE DEPTH	19 3/4" (50 CM)	26"	25 3/4" (65 CM)
OVERALL LENGTH	13' 10" (422 CM)	14' 7"	17' 8" (538 CM)
OVERALL LOADING HEIGHT – TOP OF FLARE	35" (89 CM)	47 1/2"	45 1/2" (116 CM)
OVERALL HEIGHT W/HYD. ENDGATE	N/A	51"	49"
OVERALL WIDTH W/STANDARD TIRES	76" (193 CM)	86"	83 1/2" (212 CM)
STANDARD TIRE SIZE	6.70 X 15	IF240 80R15IMP	10R X 22.5
SPINDLE SIZE	2" (5 CM)	2" (5 CM)	2" (5 CM)
DIAMETER OF BEATER	18 1/2" (47 CM)	22" (56 CM)	27" (68 CM)
NUMBER OF PADDLES	10	8	8
MAIN APRON CHAIN	67H	T-ROD	T-ROD
BOX CONSTRUCTION	POWDER COATED STEEL	POWDER COATED STEEL	POWDER COATED STEEL
FLOOR CONSTRUCTION	BONDED POLY	BONDED POLY	BONDED POLY
APRON DRIVE	GEARBOX, 2-SPEED PTO	GEARBOX, 2-SPEED PTO	GEARBOX, 2-SPEED PTO
UPPER BEATER	N/A	OPTIONAL	OPTIONAL
SWING-AWAY JACK	STANDARD	STANDARD	STANDARD
WEIGHT W/TIRES	1,140 LBS. (517 KG)	1,600 LBS. (726 KG)	2,030 LBS. (921 KG)
OPTIONS	FINE SPREAD PAN	FINE SPREAD PAN & HYD. ENDGATE	FINE SPREAD PAN & HYD. ENDGATE