


BALE WRAPPER



INDEPENDENT POWER SOURCE

The **LINEWRAP'S** independent power source is a Honda iGX390 gas engine with electric start. An 18 amp alternator powers the hydraulic system, which controls all machine functions.

An in-line shut-off valve for the pusher eliminates any chance of movement during transport.

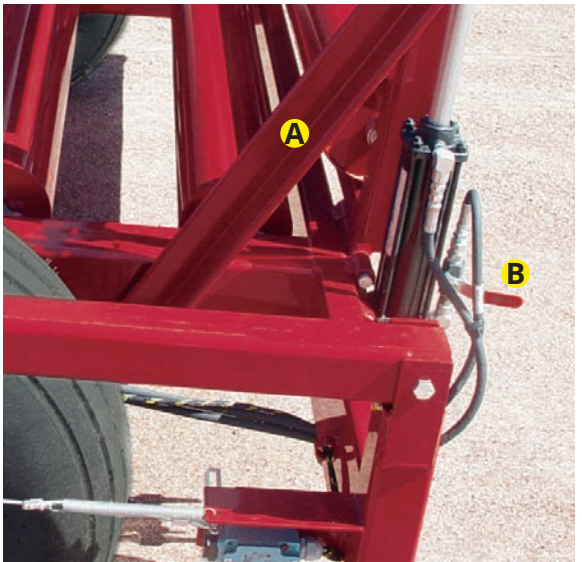

TRANSPORT BAR AND SHUT-OFF VALVE

The tailgate has a transport bar (A) to lock the tailgate. The hydraulic shut-off valve (B) must be closed for transport.



EFFICIENTLY WRAPS ROUND AND SQUARE BALES

The LW1100 **LINEWRAP** efficiently wraps round bales from 4'-6' diameter, and large square bales up to 6' 6" lengthwise or 5' long crosswise on riser. Reduce wrap costs by wrapping only the diameter of the bale.

The self-contained hydraulic system utilizes a large capacity oil reservoir (A) for cooler operation.




AUTOMATIC OPERATING MODE

Automatic operating mode allows one operator to load while the machine wraps.



CONVENIENTLY LOCATED CONTROLS

1. Automatic/manual/remote operation
2. Manual hoop revolution
3. Bale pusher movement
4. Start/reset switch
5. Tailgate raise/lower
6. Hoop speed control for wrap

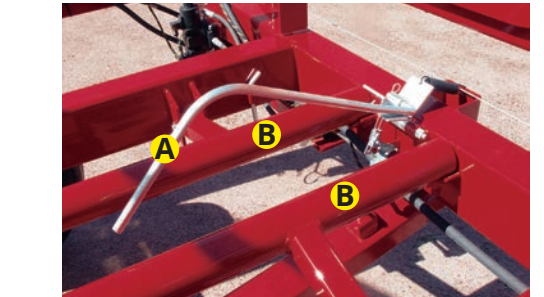

BALE TRIP SWITCH ARM AND RISER KIT

Bale trip switch (A) starts operation of machine. The riser kit allows square bales to be wrapped crosswise (B).



LINEWRAP START/STOP/STEER

The remote control is beneficial when side loading and stopping the wrapping cycle. The electric over hydraulic steering assembly is also controlled by the loading operator with the remote control.

MODEL	
POWER	HONDA iGX390 W/ELECTRIC START
HYDRAULICS	9 1/2 GALLON SELF-CONTAINED RESERVOIR
CONTROLS	AUTOMATIC/MANUAL/REMOTE
SHIPPING LENGTH	16' 10"
WIDTH	8' 10"
HEIGHT	9' 4"
WEIGHT	4,300 LBS.
LENGTH W/TAILOUT DOWN	22' 9"
TIRES	(4) 11L - 15
FILM TENSIONER	(2) 30" X 65%
BALE CAPACITY: ROUND	UP TO 6'
SQUARE	6' 6" LENGTHWISE
SQUARE	5' CROSSWISE




WARRANTY: See operator's manual for warranty details and limitations. H&S reserves the right to change its products or the description at any time without notice or obligation.

H&S MANUFACTURING

www.hsmfgco.com



H&S MAIN OFFICE • 2608 S. HUME AVE.
MARSHFIELD, WI 54449 • (715) 387-3414



H&S WAREHOUSE • 10145 LAKESHORE ROAD
P.O. BOX 1260 • RIPLEY, NY 14775 • (716) 736-7595

LW1100 LINEWRAP BALE WRAPPER



BALE-PUSH

When wrapping is finished, the bale-push is extended out manually to push the bales further down the bale ramp and complete the process.



TELESCOPING TRANSPORT POLE

The telescoping transport pole is pinned to the steering assembly when wrapping to keep the **LINEWRAP** in a straight line or to steer around obstacles.

OPTIONS



SQUARE BALE RISER SHELF

The optional riser shelf and 3rd spear is needed to wrap up to 6 1/2' long square bales lengthwise.



HIGHWAY LIGHTING KIT

3/22 2M

FAST | EFFICIENT | RELIABLE

LINEWRAP BALE WRAPPER
BALE PROCESSORS

H&S






MAXIMIZE BALEAGE
YIELD WITH LESS
TIME AND EFFORT
THAN CONVENTIONAL
WRAPPING METHODS

FEATURES

- 1. The open design of the 7' bale platform allows debris to fall through.
- 2. Emergency stop cable.
- 3. The **LINEWRAP'S** two 30" pretensioners have a 65% stretch that allows for a tightly wrapped bale.
- 4. Bale guides center the bales for wrapping and are easily adjusted.
- 5. The length of travel of the push bar is controlled with adjustable limit switches to reduce cycle time.



STANDARD LED LIGHT KIT
The standard LED light kit is perfect for evening and night wrapping in cooler conditions.

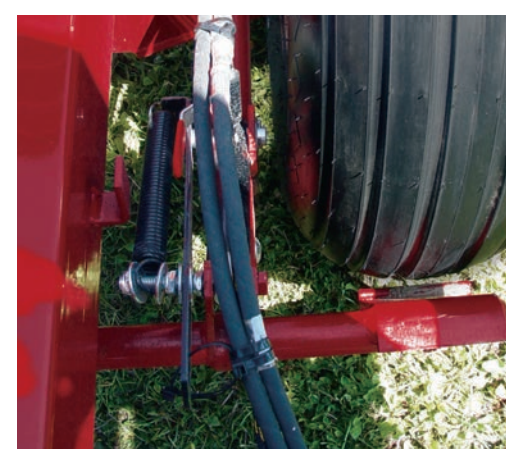

SHUT-OFF VALVE LOCKS BRAKES
A shut-off valve locks the brakes hydraulically against the tires. This prevents the wrapper from rolling ahead too easily when wrapping so proper pressure is kept between bales.



HOOP START/STOP SWITCHES



MODEL 2957 - LEFT DISCHARGE
MODEL 2958 - RIGHT DISCHARGE
Process high moisture hay and silage bales with ease!

FEATURES

- 1. Unibody frame construction with high clearance
- 2. Fully adjustable clevis hitch
- 3. Built-in PTO shaft and hydraulic hose storage bracket
- 4. Easy cradle travel adjustment
- 5. Simple hydraulic valving activates cradle rock and speed
- 6. Easy access to shear pin



With heavy-gauge steel and strong welds, the 2957 & 2958 bale processors shred round or square hay bales, corn stalk bales, and even baleage bales easily!



EASY ACCESS DOOR
Remove twine through the easy access door opposite of the discharge.



CRADLE SYSTEM
The bale processor's cradle system constantly and evenly feeds the hammers.

Unlike systems that must unroll the bale before shredding, the unique hydraulic cradle rocks bales over the hammers so the entire cross-section of the bale can be shredded at once.



LOADING FORKS
Fully adjustable loading forks handle all sizes of bales, round or square. Load up to 20 small square bales.



MODEL	LEFT DISCHARGE 2957	RIGHT DISCHARGE 2958
OVERALL LENGTH	193"	193"
WIDTH	119"	119"
HEIGHT (BODY ONLY)	98"	98"
TIRES	14L X 16.1	14L X 16.1
EMPTY WEIGHT	5,700 LBS.	5,800 LBS.
PTO	1 3/8" 21 SPLINE 1000 RPM	1 3/8" 21 SPLINE 1000 RPM
HEAVY-DUTY HITCH JACK	STANDARD	STANDARD
ADJUSTABLE HITCH WITH HEAVY-DUTY CLEVIS	STANDARD	STANDARD
HYDRAULIC CIRCUITS REQUIRED	STANDARD - 2 3RD REMOTE NEEDED FOR HYD. DEFLECTOR	STANDARD - 2 3RD REMOTE NEEDED FOR HYD. DEFLECTOR
CHAMBER LENGTH	95"	95"
ROTOR SWING DIAMETER	25 1/8"	25 1/8"
NUMBER OF HAMMERS	32	32
HAMMER SIZE	1/2" X 2" X 5 1/4"	1/2" X 2" X 5 1/4"
ROTOR LENGTH	83"	83"
WHEEL TRACK	96"	96"
MINIMUM HORSEPOWER	100 HP	100 HP
HYDRAULIC DEFLECTOR LIFT	OPTIONAL	OPTIONAL
LOWER DEFLECTOR ASSY	OPTIONAL	OPTIONAL
LED HIGHWAY LIGHTING KIT	OPTIONAL	OPTIONAL

OPTIONS

HYDRAULIC DEFLECTOR LIFT

LOWER DEFLECTOR

NEW TIRE OPTION
16.5 x 16.1
10 PLY ALLIANCE
All Super Tires/Wheels

*Tires shown in photos are no longer available and have been replaced by 14L X 16.1 flotation tires.

HIGHWAY LIGHTING KIT